



ADJUSTABLE SPRING POWER SURFACE APPLIED GRADE 1 CLOSER

44CI SERIES

HEAVY DUTY CAST IRON



5 YEAR WARRANTY

[Click Here For Info.](#)

FEATURES

- Application for HIGH TRAFFIC Doors
- Cast Iron Body; Forged Steel Arm
- Double Heat Treated Steel Pinion
- All Weather Fluid
- Non-Handed
- Non-Sized Adjustable 1 Through 6; Standard with Back Check
- Universal Application for Regular Arm, Top Jamb, or Parallel Arm Mounting
- Standard Plastic Cover - Non Handed
- Hold-open arms are adjustable for holding from 85° to 180°.
- 5 YEAR WARRANTY



OPTIONS AVAILABLE

- Metal Cover
- Heavy Duty Arm (EDA)
- Hold-Open arm
- Stop Only Arm
- Friction Hold Open Arm

FINISHES


- AL - Aluminum
- DU - Storefront Bronze

5 YEAR WARRANTY

(Other finishes available by Special Order)

TECHNICAL DIMENSIONS

Description	Dimensions
A. Length of Closer Body (With Cover)	12-1/4"
B. Horizontal Mounting Holes	SEE DRAWING
C. Vertical Mounting Holes	2-1/4"
D. Overall Height	4-7/8"
E. Top of Door to Bottom of Closer	3-11/16"
F. Closer Body Height	3-1/2"
G. Projection from Door	2-1/4"

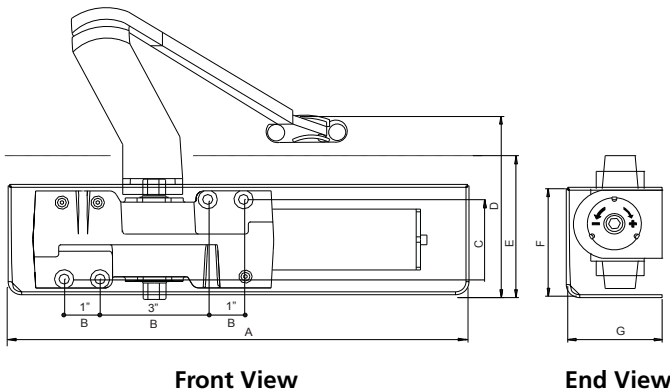


44CI Series Comparison Footprint Chart (5" x 2-1/4")

Advantage 8000	Arrow DC500	C.R. Laurance PR90	Cal Royal CR441	Calibre 4001
Cooper Creek/Bulldog CL8844	Deltana DC40	Design Hardware 416	EZ-Set DO 4	General Lock C9000
Global (Imperial USA) TC4300	Hager 5100	Harney Hardware DC8400	Independace2 4040	Inox/Unison Hardware DC90
Lawrence Hardware LH8016	LCN 4040XP, 4041	LSDA DC6816	Marshall Best QDC-40	MaxGrade MDC100
Norton 410, 9540	Pamex GC4400	PDQ 7100	PLS DC1916	S. Parker 441BC
Seco-Larm SD-C101-SBBQ	Sentinel 4016	Stanley/K2 QDC100	Taymor 4000	Tell 900
Townsteel TDC40	Yale 5800			


International Door Closers, Inc.

COPYRIGHT 2022 INTERNATIONAL DOOR CLOSERS, INC

INSTALLATION TYPES

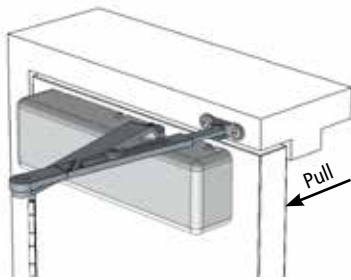

Regular Arm (Pull Side)
Permits 120° maximum opening

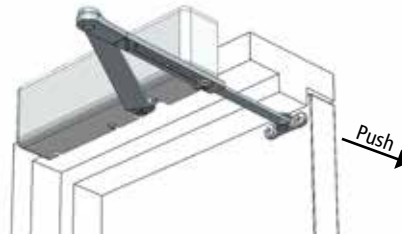

Top Jamb (Push Side)
Permits 120° maximum opening



Parallel Arm (Push Side)
Permits 180° maximum opening

44CI SERIES PARTS AND ACCESSORIES		PART NO.
	Plastic Dress Cover	DC-44
	Metal Dress Cover (special order)	DC-44M
	Complete Arm Assembly	44-2021
	Cushion - Hold-open arm - Mechanical Turn Type	44-2022
	Cushion Stop Arm	44-2023
	Friction Hold Open Arm	44-2024
	Heavy Duty Arm (EDA)	44-2026
	Parallel Bracket	425
	Drop Plate for Pull Side installation when top Door Rail is less than 3-3/4". Requires a 2" minimum height Door Rail.	44-18
	Drop Plate for Top Jamb installation when ceiling is flush to top of Header. Requires a minimum 1-3/4" header height.	44-18G
	Drop Plate for Top Jamb installation on Door Headers less than 3-1/2" in height.	44-18J
	Drop Plate for Parallel Arm installation on Door Rails less than 5-1/2" (measured down from the door stop). Requires a 2" minimum height Door Rail.	44-18PA

*in lieu of standard

SPECIFY FINISH:

- AL - Aluminum
- DU - Storefront Bronze