



5 YEAR WARRANTY
[Click Here For Info.](#)

SURFACE APPLIED GRADE 1 CLOSER

8000-TP SERIES

GRADE 1 • FIRE RATED • HANDICAP

FEATURES

- **Model 8051-TP** Standard with Sweep, Latching, and Back-Check
- **Model 8052-TP** Standard with Sweep, Latching, and Delayed Action
- Adjustable Spring Power Size 1 through 6
- Cast Aluminum body; forged steel arm
- Tri-packed for regular arm, top jamb and parallel arm application
- Hold-open arms are adjustable for holding from 90° to 180°

OPTIONS AVAILABLE

- Drop Plate, Hold Open Arm
- Replacement for Norton 1600 or 1601



FINISHES

- AL - Aluminum
- DU - Storefront Bronze

5 YEAR WARRANTY


TECHNICAL DIMENSIONS

Description	Dimensions		
A. Length of Closer Body	9-3/4" (248 mm)	Front View End View	
B. Horizontal Mounting Holes	9-1/16" (230 mm)		
C. Vertical Mounting Holes	3/4" (19 mm)		
D. Closer Body Height	1-13/16" (46 mm)		
E. Projection from Door	2-3/4" (70 mm)		

International Door Closers, Inc.

COPYRIGHT 2022 INTERNATIONAL DOOR CLOSERS, INC

INSTALLATION TYPES

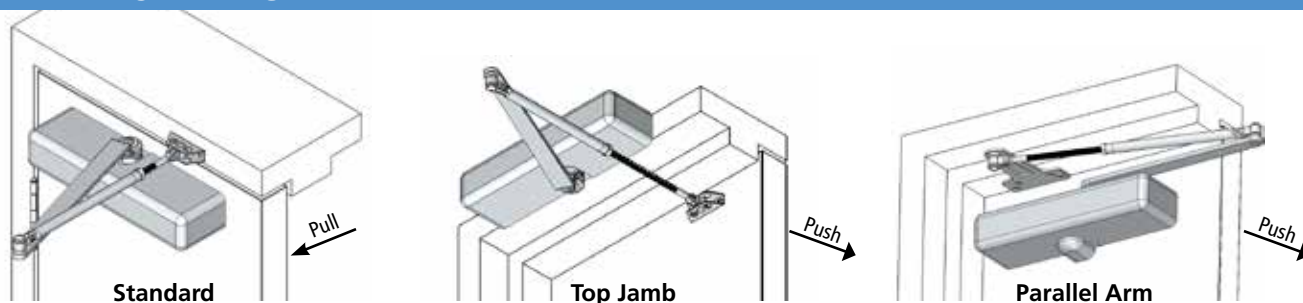

TYPICAL INSTALLATIONS (REGULAR ARMS SHOWN) Hold-Open Arms are similar

MODEL NO.		Size
Tri-packed; With Back-Check	Tri-packed; With Delayed Action	
8051-TP	8052-TP	1-6

Regular & Top Jamb				Parallel Arm			Applicable Door Weight Lbs (Kg)
Maximum Size of Door							
Closer Size	Interior	Exterior Inswing	Exterior Outswing	Closer Size	Interior	Exterior Outswinging	
1	28" (0.71m)			1			33-66 (15-30)
2	36" (0.91m)			2	30" (0.76m)		66-99 (30-45)
3	42" (1.07m)	30" (0.76m)	36" (0.91m)	3	36" (0.91m)	30" (0.76m)	99-143 (45-65)
4	48" (1.22m)	36" (0.91m)	42" (1.07m)	4	42" (1.07m)	36" (0.91m)	143-187 (65-85)
5	54" (1.37m)	42" (1.07m)	48" (1.22m)	5	48" (1.22m)	42" (1.07m)	178-264 (85-120)
6	60" (1.52m)	48" (1.22m)	54" (1.37m)	6	54" (1.37m)	48" (1.22m)	264-330 (120-150)

8000-TP SERIES PARTS AND ACCESSORIES	DESCRIPTION	PART NO.	NOTE: Doors of unusual height or weight, or doors subject to severe wind or draft conditions, or abusive usage, require one or two more full turns of hex spring adjustment nut than shown on the Installation instructions. SPECIFY: Closer Model or Part Number SPECIFY FINISH: Al-Aluminum DU -Storefront Bronze
	Main Arm	520	
	Regular Forearm	521	
	Hold-Open Forearm *Hold-Open Forearm in lieu of standard	522 522*	
	Parallel Bracket for Regular Arm	525	
	Flat Drop Bracket for Closers - With Dress Cover	547	
	FTop Jamb Bracket	TJB-54	
	Dress Cover	DC-8000	
	Thru Bolt & Grommet Nut (Set of 4 each) *Packed With Closer in lieu of standard	TBGN-50	
	Sex Nuts & Bolts	18-SN	

*in lieu of standard